


MP01000

Multiparameter Patient Monitoring Module

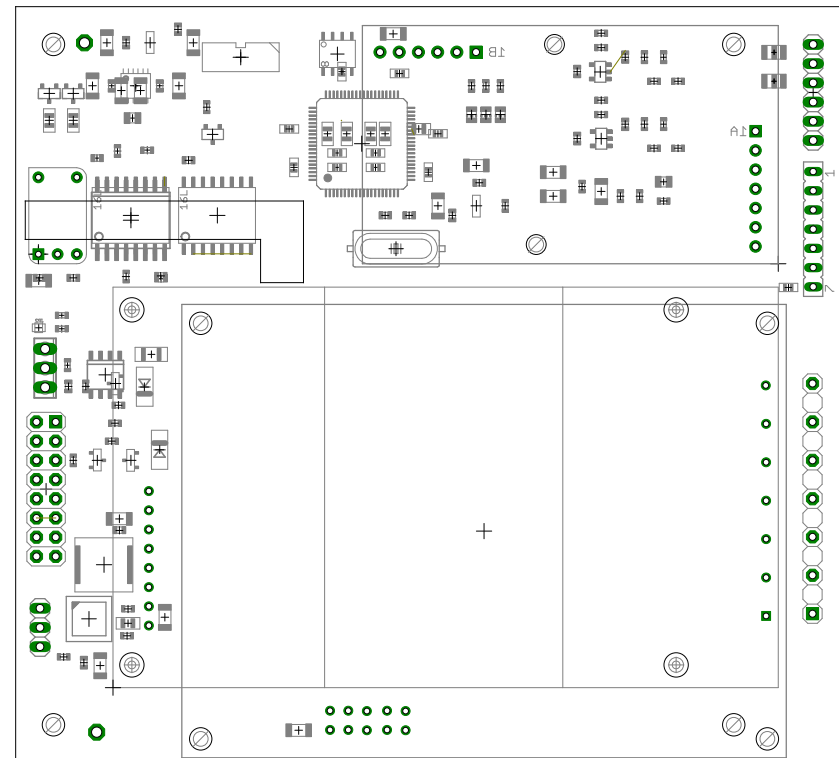

Original Size

GENERAL

- Advanced signal processor technology with digital filtering for all parameters
- Small size (110 x 100 mm), maximum height 40 mm.
- Single power supply (6-15 V DC), 900 mW (@7V, while NIBP not measuring)
- Maximum power requirement 2800 mW, while NIBP measuring
- Power down input, powers down the complete system
- RS232 and TTL level serial asynchronous (UART) interface
- CAN interface with user selectable bit rate and identifier addresses
- Integrated patient isolation in accordance to IEC 60601
- Integrated defibrillation protection for ECG and temperature

ECG

- Monitors I, II, III, aVR, aVL, aVF and one chest lead with five lead cable
- Measurement of pulse rate, range 30 – 249 bpm
- User selectable curve transmission rate and amplification
- Command selectable monitoring - or diagnostic bandwidth
- Integrated pacemaker detection and lead-off detection for each electrode
- Measurement of respiration rate over electrode impedance (optional)
- Highly accurate isolated ECG trigger output
- Complies with newest revision of IEC60601-2-27

SpO₂

- Lock-in based signal recovery down to a pulsation of 0.05 % (AC / DC ratio)
- Ultra low noise design for highest performance on centralized patients
- Excellent suppression of artefacts, ambient light and electromagnetic disturbances
- Transmits SpO₂, pulse rate, plethysmographic waveform, perfusion index
- Selectable transmission speed of waveform and averaging of SpO₂
- Complete line of re-usable and disposable probes available
- Complies with newest revision of IEC60601-2-61


NIBP

- Purely oscillometric method, short measurement time
- Redundant pressure sensor and pressure relieve valve for patient safety
- Neonatal and adult modes
- Transmission of pulse rate, systolic-, mean-, and diastolic pressure
- User selectable automatic cyclic measurements
- Clinically validated for adults and neonates
- Complies with newest revision of IEC60601-2-30 and ISO81060-2

TEMPERATURE

- Two independent channels, plus reference channel
- Measuring range 25.0 °C up to 50.0 °C
- Compatible with all YSI 400 Probes

ECG
SpO₂
NIBP
Temp

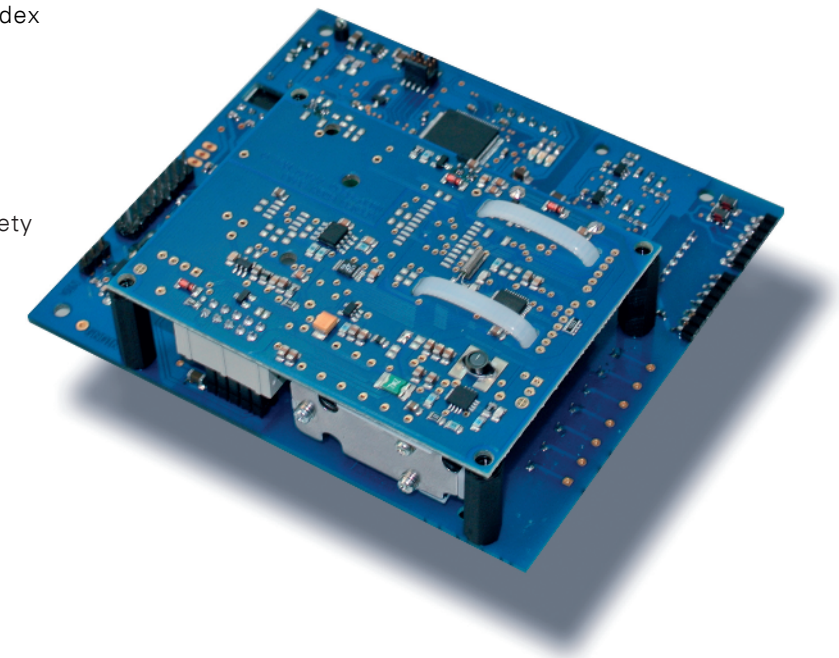

medlab

medizinische Diagnosegeräte GmbH
Helmholtzstrasse 1
D 76297 Stutensee near Karlsruhe
Germany
Tel.: +49 (0) 7244 74110 0
FAX: +49(0) 7244 74110 28
sales@medlab.eu
oem.medlab.eu

**PRELIMINARY
INFORMATION**
(product available
December 2013)

contact us for
more information
sales@medlab.eu